

# MIPOLAM ACCORD

gerflor.com

NEW



**Gerflor®**  
theflooringgroup

# MIPOLAM ACCORD

|                                                                                   |       |           |                                                                                                    |
|-----------------------------------------------------------------------------------|-------|-----------|----------------------------------------------------------------------------------------------------|
|  | 34-43 | Evercare™ |  100 % recyclable |
|-----------------------------------------------------------------------------------|-------|-----------|----------------------------------------------------------------------------------------------------|



**0341 Oman**  
WR: 0585 0620  
NCS: 2002-Y50R / LRV: 42,9



**0343 Oro**  
WR: 0585 2466  
NCS: 4005-Y50R / LRV: 25,3



**0344 Ospedal**  
WR: 0585 2237  
NCS: 6005-Y50R / LRV: 15,1



**0340 Paladru**  
WR: 0585 2227  
NCS: 3500-N / LRV: 34,3



**0342 Pozzolo**  
WR: 0585 2473  
NCS: 5500-N / LRV: 20,4



# MIPOLAM ACCORD



**0301 Louise**  
WR: 0585 0528  
NCS: 1002-Y50R / LRV: 68,2



**0321 Salt**  
WR: 0585 0196  
NCS: 1002-B / LRV: 70,9




**0330 Kruger**  
WR: 0585 0075  
NCS: 4502-B / LRV: 27,5



**0305 Light Sand**  
WR: 0585 2343  
NCS: 1005-Y30R / LRV: 66,0




**0312 Powell**  
WR: 0585 2415  
NCS: 1502-B / LRV: 58,1

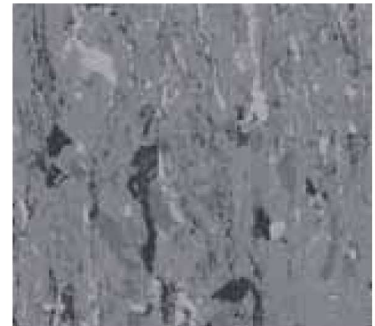

**0350 Pukaki**  
WR: 0585 0033  
NCS: 5502-B / LRV: 19,6



**0324 Sand**  
WR: 0585 0660  
NCS: 2010-Y30R / LRV: 53,3

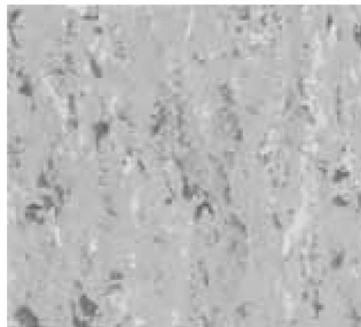

**0319 Toba**  
WR: 0585 0509  
NCS: 2502-B / LRV: 43,4



**0359 Michigan**  
WR: 0585 0495  
NCS: 6005-R80B / LRV: 18,3



**0303 Manitoba**  
WR: 0585 0498  
NCS: 1005-Y50R / LRV: 66,6



**0320 Ontario**  
WR: 0585 0687  
NCS: 3010-R80B / LRV: 36,4



**0360 Balaton**  
WR: 0585 0751  
NCS: 8502-B / LRV: 7,9



Homogeneous sheet without foam backing (Compact) - Tiles (608 x 608 mm) available for a minimum order quantity of 500m<sup>2</sup>

WR: Welding Rod - LRV: Light Reflectance Value


# MIPOLAM ACCORD



**0310 Huron**  
WR: 0585 0093  
NCS: 2005-R80B / LRV: 50,1



**0332 Dore**  
WR: 0585 0110  
NCS: 1030-Y20R / LRV: 59,4

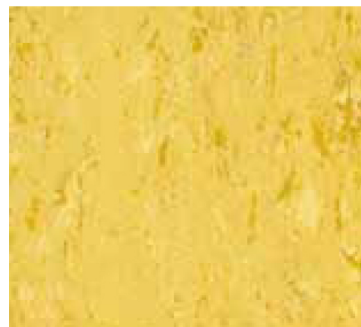

**0322 Cinto**  
WR: 0585 0192  
NCS: 1050-Y / LRV: 50,0



**0306 Inari**  
WR: 0585 0397  
NCS: 1020-R90B / LRV: 53,7



**0327 Garda**  
WR: 0585 2590  
NCS: 2030-G70Y / LRV: 41,1




**0315 Orange River**  
WR: 0585 2913  
NCS: 3050-Y60R / LRV: 18,7



**0316 Malaren**  
WR: 0585 0500  
NCS: 3030-R90B / LRV: 32,3



**0347 Green Lake**  
WR: 0585 2591  
NCS: 3030-G30Y / LRV: 30,8

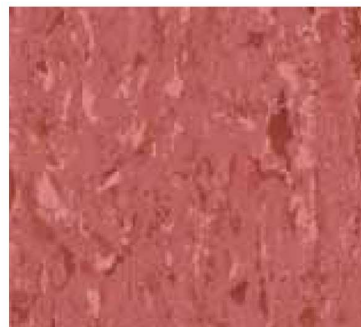

**0365 Red Sea**  
WR: 0585 2256  
NCS: 3040-Y90R / LRV: 18,4



**0346 Roxen**  
WR: 0585 0691  
NCS: 4040-R90B / LRV: 17,0




**0366 Blue Wave**  
WR: 0585 2593  
NCS: 3040-B / LRV: 25,0



**0348 Aurora**  
WR: 0585 2592  
NCS: 6020-R40B / LRV: 10,4

# MIPOLAM ACCORD

- ▶ High performance homogeneous flooring suitable for heavy duty traffic areas, available in sheet format.
- ▶ **Group T** wear rating compliant (very high resistance to traffic).
- ▶ Semi-directional polychrome design, available in a large choice of 29 contemporary colours.
- ▶ Modern surface with a matt finish.
- ▶ Evercare™ surface treatment: no wax for life.
- ▶ Bacteriostatic and fungistatic for better hygiene.
- ▶ 100% recyclable.

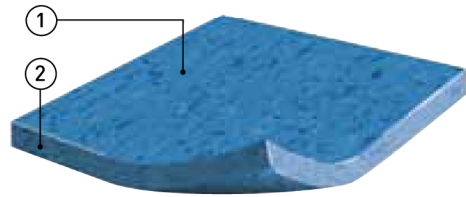

- ① evercare™ treatment
- ② Densely calendared compacted surface



## evercare™ TECHNOLOGY

### Patented Gerflor Technology

- ▶ Obtained by UV laser cross-linking

### High Performance

- ▶ Durability & Resistance

### Easy maintenance

- ▶ No wax for life

### Low Environmental Impact

- ▶ Saves water and detergent

GERFLOR TREATED 

Extreme stain resistance (Eosin test)



### INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

### MAINTENANCE

No emulsion is required. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser; more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available from Gerflor.

DESCRIPTION / *BESCHREIBUNG* / DESCRIPTION / *BESCHRIJVING* / DESCRIPCIÓN / *DESCRIÇÃO* / DESCRIZIONE

Mipolam Accord

|                                                                                                                                                                                                              |                   |             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------|
| Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Essadura total</i> / Spessore totale                                                                      | EN 428 mm         | 2           |
|                                                                                                                                                                                                              | ASTM F386-02 inch | 0.080       |
| Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso                                                                                                                          | EN 430 g/m²       | 2850        |
| Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rollenlengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli | EN 426 cm/lm      | 200/20      |
|                                                                                                                                                                                                              | - feet - inch     | 6' 6" / 66" |
| Coverage / roll                                                                                                                                                                                              | - m²              | 40          |
|                                                                                                                                                                                                              | - sq.ft           | 430.56      |

CLASSIFICATION / *KLASSIFIZIERUNG* / CLASSIFICATION / *CLASSIFICATIE* / CLASIFICACIONES / *CLASSIFICAÇÕES* / CLASSIFICAZIONI

|                                                                                                                                                                                                           |                           |           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------|
| Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto                                                              | -                         | EN 649    |
|                                                                                                                                                                                                           | ASTM F 1913-04            | compliant |
| European classification / <i>Europäische Klassifizierung</i> / Classement européen / <i>Europese classificatie</i> / Europea / <i>Europeia</i> / Europea                                                  | EN 685 class              | 34-43     |
| K rating / <i>Beanspruchungsklasse</i> / Classement K / <i>K classificatie</i> / Clasificación K / <i>Classificação K</i> / Classificazione K                                                             | - class                   | K5        |
|                                                                                                                                                                                                           | EN 13501-1 class          | Bfl - s1  |
| Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco                                                                               | ASTM E648-08 class        | Class 1   |
|                                                                                                                                                                                                           | CAN/ULC 102.2             | -         |
| Slip resistance wet / <i>Rutschhemmung</i> / Glissance humide / <i>Anti-slip</i> / Deslizamiento húmedo / <i>Escorregamento húmido</i> / Scivolosità umida                                                | DIN 51130 / BGR 181 class | R9        |
| Static electrical propensity / <i>Begehaufadung</i> / Potentiel de charge / <i>Elektrische eigenschappen</i> / Comportamiento electrostático / <i>Comportamento electrostático</i> / Resistenza elettrica | EN 1815 kV                | < 2       |

PERFORMANCE / *TECHNISCHE EIGENSCHAFTEN* / PERFORMANCES / *TESTRESULTAAT* / CUALIDADES TÉCNICAS / *PERFORMANCES* / CARATTERISTICHE TECNICHE

|                                                                                                                                                                                                                                                                                      |                        |              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------|
| Wear resistance / <i>Verschleißverhalten</i> / Résistance à l'usure / <i>Slijtvastheid</i> / Abrasión / <i>Abrasão</i> / Resistenza all'abrasione                                                                                                                                    | EN 660.2 mm³           | ≤ 2.0        |
| Wear group / <i>Verschleißgruppe</i> / Groupe d'abrasion / <i>Groep slijtvasheid</i> / Grupo de abrasión / <i>Grupo de abrasão</i> / Gruppo di abrasione                                                                                                                             | EN 649 group           | T            |
| Type binder content / <i>Bindenmittelgehalt</i> / Teneur en agent liant                                                                                                                                                                                                              | ISO 10581 Type         | I            |
| Dimensional stability / <i>Maßstabilität</i> / Stabilité dimensionnelle / <i>Maatvastheid</i> / Estabilidad dimensional / <i>Estabilidade dimensional</i> / Stabilità dimensionale                                                                                                   | EN 434 %               | Sheet ≤ 0.40 |
| Residual indentation / <i>Resteindruck</i> / Poinçonnement statique rémanent / <i>Indrukbelasting</i> / Punzonamiento / <i>Punçoamento</i> / Impronta                                                                                                                                | EN 433 mm              | 0.03         |
| Thermal conductivity / <i>Wärmeleitfähigkeit</i> / Conductivité thermique / <i>Thermische weerstand</i> / Resistencia térmica / <i>Resistência térmica</i> / Resistenza termica                                                                                                      | EN 12 524 W/(m.K)      | 0.25         |
| Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce                                                                                                                         | EN 20 105 B02 degree   | ≥ 6          |
| Castor chair test / <i>Stuhlrollenbeanspruchung</i> / Essai de la chaise à roulettes / <i>Rolweerstand bureaustoelen</i> / Determinación del efecto de una silla con ruedas / <i>Resistência a cadeiras de rodas</i> / Resistenza al passaggio di sedie con rotelle (Type W / Typ W) | EN 425 -               | OK           |
| Dekontaminierbarkeit                                                                                                                                                                                                                                                                 | DIN 25415-1 / ISO 8690 | Sehr gut     |

|                                                                                                                                                                                                                                                                              |                   |                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici                         | EN 423 class      | OK<br>beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung. |
| Fungistatic and bacteriostatic treatment / <i>Fungistatisch und bakteriostatisch</i> / Fongistatique et bactériostatique / <i>Bacteriologisch en schimmelwerend</i> / Bacteriostático y fungistático / <i>Bacteriostático e fungistático</i> / Batteriostatico e micostatico | -                 | OK                                                                                                                                                                     |
| Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie                                                                            | -                 | Evercare™                                                                                                                                                              |
| TVOC after 28 days / <i>TVOC (28 Tage)</i> / TVOC (28 jours) / <i>TVOC (28 dagen)</i> / TVOC (28 dias) / <i>TVOC (28 dias)</i> / TVOC (28 giorni)                                                                                                                            | ISO 16000-6 µg/m³ | < 10                                                                                                                                                                   |

CE marking / *CE Kennzeichnung* / Marquage CE / *EG-conformiteitsmerk* / Marca de conformidad CE / *Marca de conformidade CE* / Marcatura CE di conformità

|    |          |   |                                                                                       |
|----|----------|---|---------------------------------------------------------------------------------------|
| CE | EN 14041 | - |  |
|    |          | - |  |



Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings & Protections



Entrance mats



Skirtings & Profiles

and Be CONNECTED!



www.gerflor.com



Health & Safety



ISO 14001



Recycling



Life Cycle Analysis

Committed to sustainable development

**Gerflor**  
theflooringgroup